


Android OPS (EDLA Certified)

fact!

Access all of Google's latest updates and features

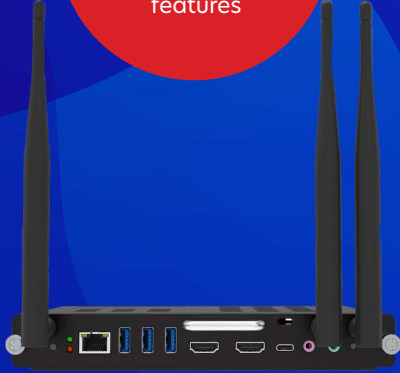

All your favorite google apps.


Embrace the full spectrum of Google's ecosystem with our comprehensive Google EDLA integration.

Tap into the convenience of Google Drive for effortless storage and sharing, harness the collaborative power of Google Docs, analyze data with Google Sheets, and create impacting presentations with Google Slides, among other robust Google applications.



google playstore ready.

Plug the QOMO Android OPS into your favorite QOMO display and access the world of Google Playstore. Your favorite apps are available with a single touch included Microsoft apps, Youtube, and Netflix

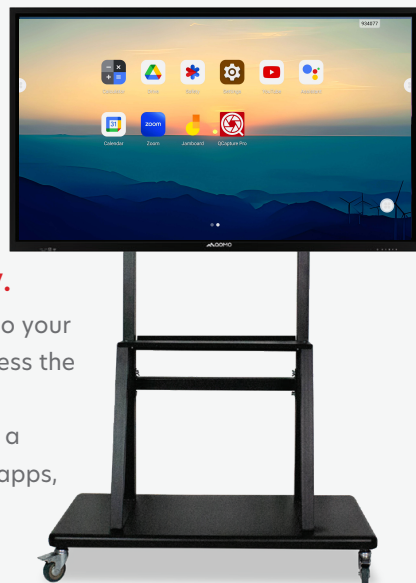

✓ What Sets Us Apart

modularized OS system

STAY UP TO DATE

Upgradeable Android OPS Module to make sure you always have the latest tech.

it's a powerhouse.

128gb of storage

Easily contains all of your favorite apps and content with 128 GB of storage and 8 GB Ram. Spend less time waiting for apps to load and more time presenting.

advanced security.

Never worry – EDLA certification means staying up to date with all the latest google security patches. Meaning protection against unauthorized access, cyber attacks, passwords, and data loss

ultra HD 4K resolution.

4 times more res than full hd

Sharper, crisper, clearer image – whether you're streaming live or watching a recording. From the front of the room all the way to the back, everyone sees the same clear image.

IT-friendly.

control Radix Viso mdm or Google Admin Console

IT managers have a comprehensive platform to centrally and easily manage touch panels and devices with remote access. **Push updates, display messages and alerts, and more.**

Model: QIT-And13-1

Operating System	Android 13 EDLA Certified
Working Voltage	12-19V, current≥3A
CPU	Quad-core A78_2.6Ghz +Quad-core A55_2.0Ghz
GPU	Mali G57 MC5_880Mh
RAM/ROM	8GB DDR4/ 128GB
WIFI/Bluetooth	WIFI 6/ Bluetooth 5.2
RJ45	RJ45 x1
USB	USB3.0 x3, USB C x1 (DP 1.2 out+USB 2.0 device or USB 3.0 host)
HDMI	HDMI (2.0) in, HDMI (2.0) out
Analog Mic	Connects to microphone
Line out	Connects the device to speakers
Button	Power, Reset

Operating Conditions

Operating Conditions	2°F to 113°F (0°C to 45°C)	10% ~ 90% non-condensing
Storage Conditions	-4°F to 140°F (-20°C to 60°C)	10% ~ 90% non-condensing

Additional Specs

Weight	1.7 lbs (0.75 kg)
Product Dimensions	7.9x4.6x1.2 in (200×118×30 mm)
Power Consumption	35 W
Compatibility	QOMO Journey 14, BundleBoard G, BundleBoard H
Hardware Warranty	3 Years

Authorized QOMO Reseller:

Tech Support: support@qomo.com

Sales Team: sales@qomo.com

q o m o . c o m

Copyright ©2024 QOMO, LLC. All rights reserved. This document may not be copied in any form without permission from QOMO, LLC. Information in this document is subject to change without notice.