

Introduction to the QRF500 audience response system

1、 Remotes and Dongle

Load two “AAA” batteries into the Instructor and Student remotes. Turn on the Power at the bottom of the remotes.

2、 Start the Software

- Install the QClick software from the USB drive.
- Plug in the USB dongle which should be automatically recognized by QClick.

*Note: The default username and password are both qomo.

3、 Prepare an Exam

- Select a question type from the Add a Question section, and click a selection from the option menu to add a template slide. You can add slides through PPT.
- Click Show Details on the Question Setting section.
- Set the question properties from the dropdown list, such as Question Mode, Quiz Timer, and Points.
- Type your question and answer choices in the template. In the Question Detail section, click Obtain to display the text and answers in the Question Detail fields.
- Set the correct answer by clicking the check box of answer options under Answers.

4、 Student Login

The student remote will automatically login to the class, and the screen will display the current question number when a new question has started.

5、 Instructor Login

From the home screen, click the button **4** to login. When your class information appears on the screen, press the top left function key to select OK then your exam details will appear on the remote screen.

*Note: After you starting the quiz, you need login in Menu for the first time. From the second time, you can also press "send" key to login quickly after starting quiz.

6、 Run a Quiz

- Click the Start button in the Tools section to choose a quiz mode. A quiz setting window will pop up.

*Note: The QClick toolbar will appear and shows “QRF500 Connected”. If the toolbar shows “No Host” re-plug the USB dongle.

- Select a class from the drop-down list in the quiz setting window.
- Click the check boxes necessary for your session.
- Click Start to run the quiz.
- You can operate your exam by the toolbar during exam.

7、 Tools

- Class-Manage students information.
- Report-Check the exam result and analysis.
- Setting-Set QClick and hardware information.
- Database-Backup or recover user account.
- Help-User Manual, Training video and support.

QRF500 Quick Guide




Parts Identification



1. Turns unit on and off
2. Screen Display
3. Send a response
4. Be used to backspace
5. Scroll to the left and is used to go to the previous question during paper quiz mode
6. Button for "Rush Quiz" activity mode
7. Scroll to the right and is used to go to the next question during paper quiz mode
8. Button for "True and False" Question Mode
9. Button for "True and False" Question Mode
10. Labeled "A1" to "J0" and "a" to "z" for alpha numeric inputs
11. Used to enter the plus "+", the minus "-", the division "/" or the decimal point "." signs
12. Used to enter a space
13. Toggle between multiple choice options, and alphabet and numeric key functions

* Press H+ **6** keys and release simultaneously, then press MODE key to set language

Parts Identification

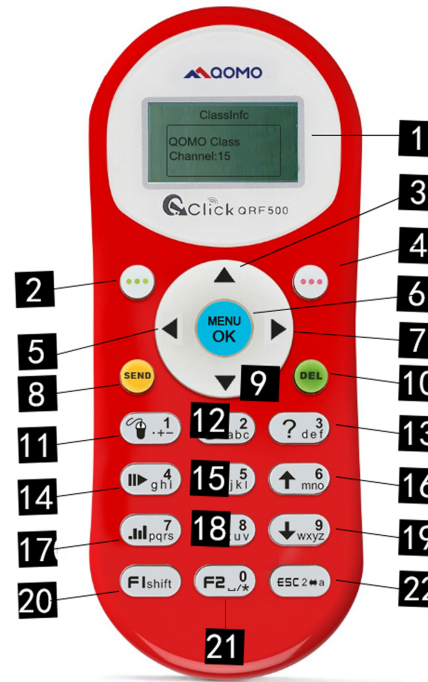

1. Screen Display
2. Confirm an operation that appears on the bottom left of the screen
3. Scroll screen display up
4. Confirm an operation that appears on the right bottom or login
5. Move cursor to the left
6. Confirm a selection or enter the main Menu to set Channel or language etc.
7. Move cursor to the right
8. Send question or quick login
9. Scroll screen display down
10. Delete and backspace
11. Mouse function
12. Display student records
13. Number 3
14. Start or pause or logs you back into a class
15. Stop current activity
16. Display previous ppt slide, question or page up
17. Display histogram of results
18. Display Score Board
19. Advance ppt slide, show next question or page down
20. Function key, set timer
21. Function key, set Register/Answer status bar and tool bar
22. Escape or exit an exam and toggle among multiple choice inputs, alphabet and numeric key functions